



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 07 DEC 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

IB/04/52524

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03104545.3

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 03104545.3
Demande no:

Anmeldetag:
Date of filing: 04.12.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS
Philips Intellectual Property & Standards
GmbH
Steindamm 94
20099 Hamburg
ALLEMAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Modulator system

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H04B1/707

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

Modulator system

The invention relates to a modulator system comprising a first modulator for modulating an input signal according to a first modulation scheme and a second modulator for modulating the input signal according to a second modulation scheme, to a transmitter comprising such a modulator system, to a modulator, to a method and to a processor program product.

Examples of such a transmitter are mobile radio terminals and base stations and network nodes operating in a Global System for Mobile telecommunication (GSM) supporting an Enhanced General Packet Radio Service (EGPRS) or a Universal Mobile Telecommunication System (UMTS).

A prior art modulator system is known from the article "Combined GMSK and 8PSK Modulator for GSM and EDGE, by Peter Bode and Alexander Lampe, Philips Semiconductors Nuremberg, Germany, and Markus Helfenstein, Philips Semiconductor Zürich, Switzerland, which discloses in its Figure 5 a first modulator (modulation scheme : eight Phase Shift Keying or 8PSK) and in its Figure 6 a second modulator (modulation scheme : Gaussian Minimum Shift Keying or GMSK). During a modulation scheme change, discontinuities in the output signal of the modulator system may arise, which increase the adjacent channel interference. To avoid this adjacent channel interference, a power amplifier for amplifying this output signal is ramped down during the modulation scheme change. This ramping down is realized by creating a zero output signal of the modulator system through signal shaping during the modulation scheme change.

The known modulator system is disadvantageous, inter alia, due to causing the power amplifier to be ramped down. This limits the possible power amplifiers to be used. Some power amplifiers may not be ramped down and require an always non-zero signal at their input.

It is an object of the invention, inter alia, to provide a modulator system having relatively little discontinuities in its output signal during a modulation scheme change, without this output signal being ramped down.

Further objects of the invention are, inter alia, to provide a transmitter comprising such a modulator system having relatively little discontinuities in its output signal during a modulation scheme change, without this output signal being ramped down, and a modulator, a method and a processor program product all having relatively little discontinuities in their output signal during a modulation scheme change, without this output signal being ramped down.

The modulator system according to the invention comprises a first modulator for modulating an input signal according to a first modulation scheme and a second modulator for modulating the input signal according to a second modulation scheme, which modulator system comprises a compensator for combining at least one modulator signal with at least one waveform for compensating at least one signal parameter of an output signal for discontinuities resulting from a modulation scheme change.

By providing the modulator system with the compensator for compensating one or more signal parameters of the output signal of the modulator system for discontinuities, these discontinuities resulting from modulation scheme changes are reduced to a relatively large extent. The combining like for example multiplying and/or adding of for example modulated signal with a waveform allows at least one modulated signal to be adapted in such a way that a discontinuity between a first modulation signal modulated according to a first modulation scheme and a second modulation signal modulated according to a second modulation scheme is smoothened to a relatively large extent. Usually this will be done during a so-called guard interval located between some data symbols and (three) tail symbols respectively on one side and (three) tail symbols and some data symbols respectively on the other side. Alternative guard intervals can be located between some data symbols on one side and some data symbols on the other side.

A first embodiment of the modulator system according to the invention is defined by further comprising at least one rule stored with the compensator being located

complex valued waveform, with the at least one signal parameter comprising an amplitude and a phase. By providing the compensator when located after the one or more pulse shapers with the multiplier, discontinuities in the amplitude as well as in the phase of at least one pulse shaped modulated signal are smoothened via one multiplier receiving the complex
5 valued waveform.

A third embodiment of the modulator system according to the invention is defined by further comprising at least one pulse shaper, with the compensator being located before the pulse shaper. By locating the compensator before the one or more pulse shapers of the modulators, the compensator can be integrated into the modulators. Usually, a first part of
10 the compensator will be integrated into the first modulator, and a second part of the compensator will be integrated into the second modulator.

A fourth embodiment of the modulator system according to the invention is defined by the compensator comprising at least one multiplier for multiplying the modulator signal in the form of at least one modulated signal with the waveform, with the at least one
15 signal parameter comprising an amplitude. By providing the compensator when located before the one or more pulse shapers with at least one but usually two multipliers, discontinuities in the amplitude of at least one modulated signal are smoothened via the one or two multipliers receiving the waveform. This waveform may be in the form of a complex valued waveform, which possibly but not exclusively comprises a real valued waveform
20 only.

A fifth embodiment of the modulator system according to the invention is defined by each modulator comprising at least one multiplier for multiplying a mapped input signal with a complex valued signal, with the compensator comprising at least one multiplier for multiplying the modulator signal in the form of the complex valued signal with the
25 waveform in the form of a complex valued phase offset, with the at least one signal parameter comprising a phase. By providing the compensator when located before the one or more pulse shapers with the at least one but usually three additional multipliers, one additional multiplier for one prior art multiplier in the first modulator and two multipliers for two prior art multipliers in the second modulator, thereby suggesting that the second
30 modulator is based on a two branch modulation scheme, discontinuities in the phase of at least one modulated signal are smoothened. Thereto, per modulation scheme, usually a different phase offset will need to be multiplied to the complex valued signal.

A sixth embodiment of the modulator system according to the invention is defined by the first modulation scheme being a Phase Shift Keying modulation scheme and the second modulation scheme being a Gaussian Minimum Shift Keying modulation scheme.

The transmitter according to the invention comprises a modulator system comprising a first modulator for modulating an input signal according to a first modulation scheme and a second modulator for modulating the input signal according to a second modulation scheme, which modulator system comprises a compensator for combining at least one modulator signal with at least one waveform for compensating at least one signal parameter of an output signal for discontinuities resulting from a modulation scheme change, which transmitter further comprises a power amplifier for amplifying the output signal. Of course, this output signal may be the output signal originating from the modulator system or a derived version thereof, like for example a digitized version thereof.

The modulator according to the invention for modulating an input signal according to a modulation scheme comprises a compensator for combining at least one modulator signal with at least one waveform for compensating at least one signal parameter of an output signal for discontinuities resulting from a modulation scheme change. This modulator either has the ability to adapt its modulation scheme, or is used in combination with an other modulator.

The method according to the invention for modulating an input signal according to a first modulation scheme and for modulating the input signal according to a second modulation scheme comprises a step of combining at least one modulator signal with at least one waveform for compensating at least one signal parameter of an output signal for discontinuities resulting from a modulation scheme change.

The processor program product according to the invention for modulating an input signal according to a first modulation scheme and for modulating the input signal according to a second modulation scheme comprises a function of combining at least one modulator signal with at least one waveform for compensating at least one signal parameter of an output signal for discontinuities resulting from a modulation scheme change.

~~This drawing of the transmitter according to the invention is a schematic diagram of the transmitter according to the invention and is not intended to be taken literally.~~

~~The transmitter according to the invention is a schematic diagram of the transmitter according to the invention and is not intended to be taken literally.~~

~~The transmitter according to the invention is a schematic diagram of the transmitter according to the invention and is not intended to be taken literally.~~

~~The transmitter according to the invention is a schematic diagram of the transmitter according to the invention and is not intended to be taken literally.~~

alia, that discontinuities in amplitudes and/or phases of a signal can be smoothened by adapting at least the last part of this signal before the discontinuity and/or at least the first part of this signal after the discontinuity.

The invention solves the problem, inter alia, to provide a modulator system
5 having relatively little discontinuities in its output signal during a modulation scheme change, without this output signal being ramped down, and is advantageous, inter alia, in that this modulator system can be combined even with a power amplifier which may not be ramped down and which requires an always non-zero signal at its input.

These and other aspects of the invention will be apparent from and elucidated
10 with reference to the embodiments(s) described hereinafter.

In the drawings:

Fig. 1 shows in block diagram form a modulator system according to the
15 invention comprising a compensator of a first type;

Fig. 2 shows in block diagram form a modulator system according to the
invention comprising a compensator of a second and a third type;

Fig. 3 shows in an upper graph (prior art) an absolute value of an output signal
created without compensation and in a lower graph (invention) an absolute value of an output
20 signal created through compensation before pulse shaping; and

Fig. 4 shows in block diagram form a transmitter according to the invention.

The modulator system 1 according to the invention as shown in Fig. 1
25 comprises a first eight Phase Shift Keying (8PSK) modulator 2 and a second Gaussian Minimum Shift Keying (GMSK) modulator 3,4 having a first modulating part 3 (first branch) and a second modulating part 4 (second branch). An input signal A is supplied to an input of a first multiplexer 5 and via a first output of the first multiplexer 5 supplied to an input of the modulator 2 and via a second output of the first multiplexer 5 supplied to inputs of the
30 modulating parts 3,4. In modulator 2, the input signal A is supplied to a serial-to-parallel-converter 6 and then mapped by a mapper 7, after which the mapped signal is multiplied through a multiplier 8 with a signal B and a resulting modulated signal is supplied to a first input of a second multiplexer 9. An output signal of the second multiplexer 9 is supplied to an upsampler 10 and then pulse shaped by a pulse shaper 11 (a Finite Impulse Response

(FIR) Filter), after which a first pulse shaped signal is added via an adder 12 to a second pulse shaped signal coming from the modulating part 4.

In modulating part 3, the input signal A is supplied to a mapper 14, after which the mapped signal is multiplied through a multiplier 15 with a signal C and a resulting modulated signal is supplied to a second input of the second multiplexer 9. In modulating part 4, the input signal A is supplied to a Finite State Machine (FSM) 16 and then mapped by a mapper 17, after which the mapped signal is multiplied through a multiplier 18 with a signal D and a resulting modulated signal is supplied to a first input of a third multiplexer 19. An output signal of the third multiplexer 19 is supplied to an upsampler 20 and then pulse shaped by a pulse shaper 21 (a Finite Impulse Response (FIR) Filter), after which this second pulse shaped signal is supplied to the adder 12 discussed before. The added first and second pulse shaped signals are combined with a complex valued waveform E for compensating at least one signal parameter like an amplitude or a phase of the output signal F for discontinuities resulting from a modulation scheme change, as discussed below.

The first modulator 2 modulates the input signal A according to a first modulation scheme 8PSK. Thereto, the first multiplexer 5 is controlled in such a way that the input signal is supplied to the modulator 2 and not to the modulators 3,4. The input signal A is serial-to-parallel converted and then mapped and then multiplied with the signal B, with the signal B for example being equal to $\exp j(3\pi k/8)$. The second multiplexer 9 is controlled in such a way that the resulting modulated signal is upsampled and pulse shaped. In a prior art situation, with the multiplier 13 not being present, the upsampled and pulse shaped modulated signal forms the output signal F of the modulator system 1 in case of this modulator system 1 being in a 8PSK mode. Thereto, the third multiplexer 19 is controlled in such a way that a second input of this third multiplexer 19 receiving a zero signal is coupled to the third multiplexer's output.

The second modulator 3,4 modulates the input signal A according to a second modulation scheme GMSK. Thereto, the first multiplexer 5 is controlled in such a way that the input signal is supplied to the modulator 3,4 and not to the modulator 2. In the modulating part 3, the input signal A is mapped and then multiplied with the signal C, with the signal C

the upsampled and pulse shaped modulated signals form the output signal F of the modulator system 1.

So, by controlling the multiplexers 5, 9 and 19, the modulation scheme can be selected. In case of a modulation scheme change, discontinuities in the output signal F of the modulator system 1 may arise, which increase the adjacent channel interference. To avoid increased adjacent channel interference, these discontinuities can be avoided by introducing multiplier 13 (a compensator of a first type). For example, in case of four GMSK symbols arriving from the adder 12 and being fed into the multiplier 13 and then four 8PSK symbols arriving from the adder 12 and being fed into the multiplier 13 during a guard interval comprising eight symbols, the amplitudes for example equal 1, 1, 1, 1, 0.7, 0.7, 0.7 and 0.7. To avoid amplitude discontinuities, the amplitudes of eight samples of the complex valued waveform E could be chosen as 1, 0.96, 0.91, 0.86, 1.14, 1.09, 1.03 and 1. The amplitudes of the output signal of the multiplier 13 then equal 1, 0.96, 0.91, 0.86, 0.8, 0.76, 0.72 and 0.7. As a result, the amplitude smoothly decreases from 1 to 0.7, and any amplitude discontinuities in the output signal F have been avoided. The same way, any phase discontinuities in the output signal F can be avoided by supplying the eight samples of the complex valued waveform having appropriately chosen phases.

The modulator system 1 according to the invention as shown in Fig. 2 corresponds with the modulator system 1 according to the invention as shown in Fig. 1, apart from the following. Instead of multiplier 13, now multipliers 25,26 respectively have been introduced (a compensator of a second type) located between multiplexers 9,19 and upsamplers 10,20 respectively for multiplying the output signals of the multiplexers 9,19 with waveforms S,T respectively, and multipliers 22,23,24 respectively have been introduced (a compensator of a third type), coupled to multipliers 8,15,18 respectively for multiplying the signals B,C,D respectively with the complex valued phase offsets X,Y,Z respectively.

A possible setting of the multiplexers 9 (mux 9) and 19 (mux 19) during a transition from GMSK to 8PSK is as follows:

Mux 9G G G	G G G	G G G G P P P P	P P P	P P P.....
Mux 19G G G	G G G	G G G G 0 0 0 0	0 0 0	0 0 0.....

The first column with symbols shows the last three data symbols, the second column shows three tail symbols, the third column shows eight guard symbols, the fourth column shows three tail symbols, and the fifth column shows the first three data symbols.

The complex valued phase offset X for example equals

$$\exp j [\varphi_{8PSK}] = \exp j [\arg(g[k]) + \pi k/2 + \varphi_{GMSK} - \arg(p[k+1]) - 3\pi(k+1)/8 + \Delta\varphi],$$

thereby suggesting that the last GMSK symbols and the first 8PSK symbols are fed into the multiplexers 9,19 at symbol interval k and $k+1$ respectively, and that φ_{GMSK} denotes the phase offset of a preceding GMSK modulated burst and that $\Delta\varphi$ denotes a phase angle defining the phase difference between the last GMSK symbol and the first 8PSK symbol. In case all symbols $G[k]$, $P[k]$ equal "1" in the guard interval, an appropriate choice for $\Delta\varphi$ is for example $3\pi/8$. With this choice, the GMSK symbol fed into the multiplexer in symbol interval k looks like a preceding 8PSK "1" for the 8PSK symbol passed to the multiplexer in symbol interval $k+1$. The phase offset φ_{8PSK} is updated when switching from GMSK to 8PSK and remains constant during an 8PSK modulated burst.

A possible setting of the multiplexers 9 (mux 9) and 19 (mux 19) during a transition from 8PSK to GMSK is as follows:

Mux 9P P P	P P P	P P P P G G G G	G G G	G G G.....
Mux 190 0 0	0 0 0	0 0 0 0 G G G G	G G G	G G G.....

The first column with symbols shows the last three data symbols, the second column shows three tail symbols, the third column shows eight guard symbols, the fourth column shows three tail symbols, and the fifth column shows the first three data symbols.

The complex valued phase offset Y, Z for example equals

$$\exp j [\varphi_{GMSK}] = \exp j [\arg(p[k]) + 3\pi k/8 + \varphi_{8PSK} - \arg(g[k+1]) - \pi(k+1)/2 + \Delta\varphi],$$

thereby suggesting that the last 8PSK symbols and the first GMSK symbols are fed into the multiplexers 9,19 at symbol interval k and $k+1$ respectively, and that φ_{8PSK} denotes the phase offset of a preceding 8PSK modulated burst and that $\Delta\varphi$ denotes a phase angle defining the phase difference between the last 8PSK symbol and the first GMSK symbol. In case all

symbols $P[k]$, $G[k]$ equal "1" in the guard interval, an appropriate choice for $\Delta\varphi$ is for example $\pi/2$. With this choice, the 8PSK symbol fed into the multiplexer in symbol interval k looks like a preceding GMSK "1" for the GMSK symbol passed to the multiplexer in symbol interval $k+1$.

through compensation by multiplying the modulator signal in the form of the complex valued signal B,C,D with the waveform X,Y,Z in the form of a complex valued phase offset X,Y,Z, before pulse shaping. The modulation scheme change from 8PSK to GMSK takes place between symbol interval 56 and 57, with all symbols P(k),G(k) chosen to have the value "1" in the guard interval (53-60).

When demanding equal peak values for GMSK and 8PSK, the samples of the waveforms S,T should be "1" for 8PSK and about "1.5" for GMSK, when demanding equal root mean square values these samples should all be "1".

The modulator system 1 as shown in Fig. 2 calculates a phase offset Y,Z and rotates GMSK pulse shaping filter input symbols therewith, and calculates a phase offset X and rotates 8PSK pulse shaping filter input symbols therewith, and calculates an amplitude waveform S,T and multiplies GMSK/8PSK pulse shaping filter input symbols therewith.

The modulator system 1 as shown in Fig. 1 and 2 minimizes adjacent channel interference, improves the stability of phase and/or amplitude loops controlled by the output signal F, does not require ramping and ramping calculations, is simple, allows a fast transition between modulation schemes, and offers amplitude smoothing when changing between equal root mean square values and peak values for GMSK and 8PSK for free.

The transmitter 30 as shown in Fig. 4 comprises an input stage 31 for generating the input signal A for the modulator system 1, and comprises for example a digital-to-analog-converter 32 for converting the output signal F into a digital signal, and comprises for example a power amplifier 33 for amplifying the digitized output signal.

Alternative modulation schemes like for example 4PSK or 16PSK instead of 8PSK and alternative modulator system constructions are possible. Instead of multiplying $\exp j(a)$ and $\exp j(b)$, the adding of $a+b$ could be performed, and vice versa: $\exp j(a) \cdot \exp j(b) = \exp j(a+b)$.

A complex valued waveform comprises a real valued waveform, an imaginary valued waveform, or a combination of both.

It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. Use of the verb "to comprise" and its conjugations does not exclude the presence of elements or steps other than those stated in a claim. The article "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. The invention may be implemented by

means of hardware comprising several distinct elements, and by means of a suitably programmed computer. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

CLAIMS:

1. Modulator system (1) comprising a first modulator (2) for modulating an input signal (A) according to a first modulation scheme and a second modulator (3,4) for modulating the input signal (A) according to a second modulation scheme, which modulator system (1) comprises a compensator (13,22-26) for combining at least one modulator signal with at least one waveform (E,S,T,X,Y,Z) for compensating at least one signal parameter of an output signal (F) for discontinuities resulting from a modulation scheme change.
2. Modulator system (1) according to claim 1, further comprising at least one pulse shaper (11,21), with the compensator (13) being located after the pulse shaper (11,21).
3. Modulator system (1) according to claim 2, wherein the compensator (13) comprises a multiplier (13) for multiplying the modulator signal in the form of at least one pulse shaped modulated signal with the waveform (E) in the form of a complex valued waveform (E), with the at least one signal parameter comprising an amplitude and a phase.
4. Modulator system (1) according to claim 1, further comprising at least one pulse shaper (11,21), with the compensator (22-26) being located before the pulse shaper (11,21).
5. Modulator system (1) according to claim 4, wherein the compensator (25,26) comprises at least one multiplier (25,26) for multiplying the modulator signal in the form of at least one modulated signal with the waveform (S,T), with the at least one signal parameter comprising an amplitude.
6. Modulator system (1) according to claim 4, wherein each modulator (2,3,4) comprises at least one multiplier (8,15,18) for multiplying a mapped input signal with a complex valued signal (B,C,D), with the compensator (22-24) comprising at least one multiplier (22-24) for multiplying the modulator signal in the form of the complex valued

signal (B,C,D) with the waveform (X,Y,Z) in the form of a complex valued phase offset (X,Y,Z), with the at least one signal parameter comprising a phase.

7. Modulator system (1) according to claim 1, wherein the first modulation
5 scheme is a Phase Shift Keying modulation scheme and the second modulation scheme is a Gaussian Minimum Shift Keying modulation scheme.

8. Transmitter (30) comprising a modulator system (1) comprising a first
modulator (2) for modulating an input signal (A) according to a first modulation scheme and
10 a second modulator (3,4) for modulating the input signal (A) according to a second modulation scheme, which modulator system (1) comprises a compensator (13,22-26) for combining at least one modulator signal with at least one waveform (E,S,T,X,Y,Z) for compensating at least one signal parameter of an output signal (F) for discontinuities resulting from a modulation scheme change, which transmitter (30) further comprises a
15 power amplifier (33) for amplifying the output signal (F).

9. Modulator (2,3,4) for modulating an input signal (A) according to a modulation scheme, which modulator (2,3,4) comprises a compensator (13,22-26) for combining at least one modulator signal with at least one waveform (E,S,T,X,Y,Z) for
20 compensating at least one signal parameter of an output signal (F) for discontinuities resulting from a modulation scheme change.

10. Method for modulating an input signal (A) according to a first modulation scheme and for modulating the input signal (A) according to a second modulation scheme,
25 which method comprises a step of combining at least one modulator signal with at least one waveform (E,S,T,X,Y,Z) for compensating at least one signal parameter of an output signal (F) for discontinuities resulting from a modulation scheme change.

11. Processor program product for modulating an input signal (A) according to a

ABSTRACT:

Modulator systems (1) comprising modulators (2,3,4) for modulating input signals (A) according to different modulation schemes (8PSK,GMSK) cause discontinuities in the output signals (F) when switching between the schemes. By providing the modulator systems (1) with compensators (13,22-26) for compensating amplitudes/phases of the output signals (F) of the modulator system (1) for discontinuities, these discontinuities resulting from modulation scheme changes are reduced to a large extent. This may be done before/after the pulse shapers (11,21). The compensators (13,22-26) comprise multipliers for multiplying pulse shaped modulated signals with complex valued waveforms (E), or for multiplying modulated signals with waveforms (S,T), or for multiplying complex valued signals (B,C,D) with complex valued phase offsets (X,Y,Z), which complex valued signals (B,C,D) are to be multiplied with mapped input signals. As a result, the output signals (F) and/or power amplifiers (33) situated after the modulator system (1) no longer need to be ramped down.

Fig. 1

1/3

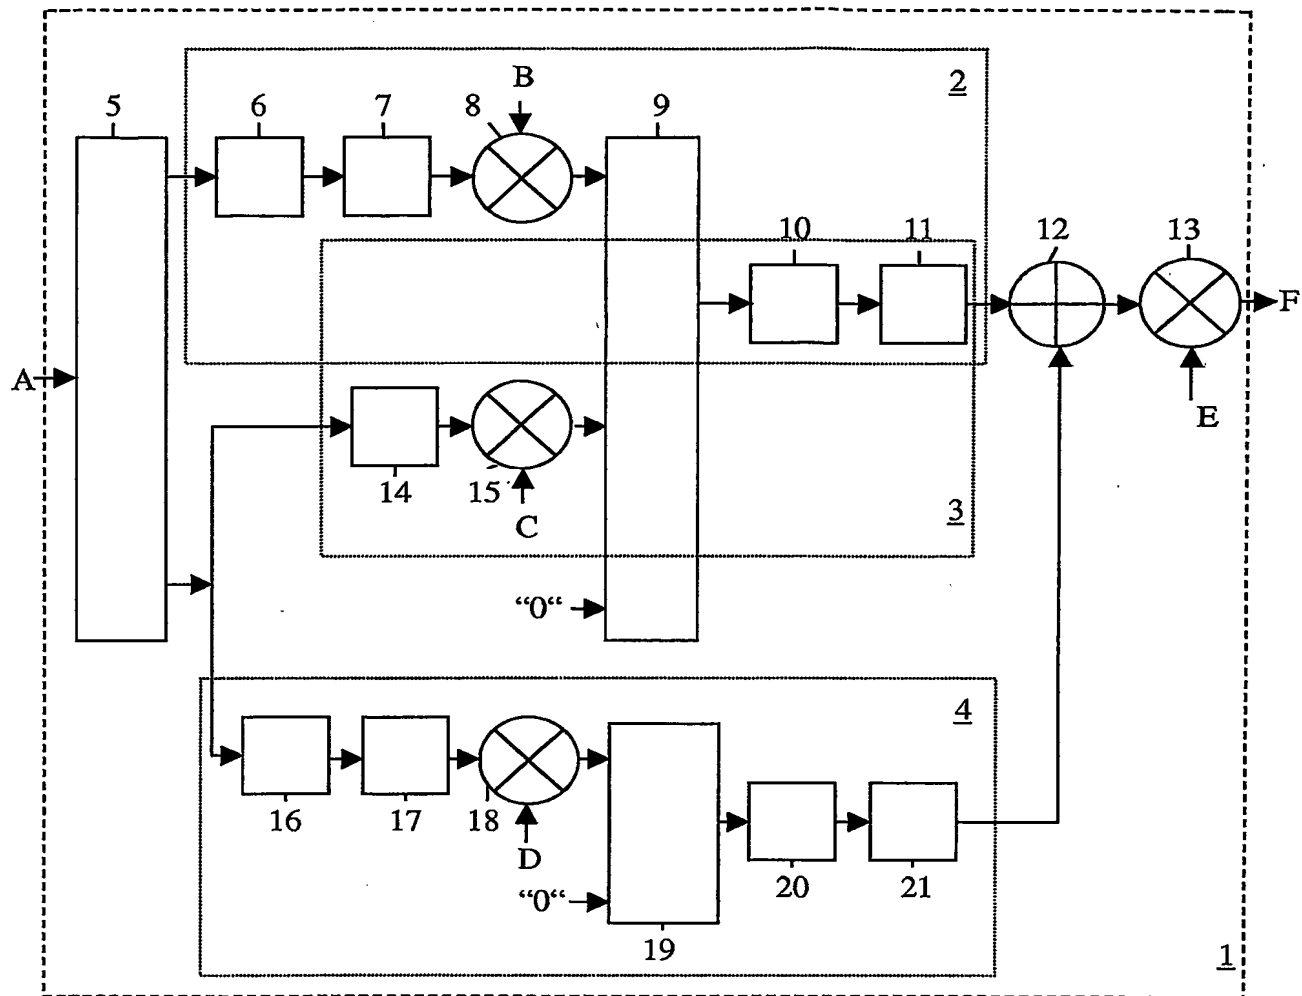


FIG. 1


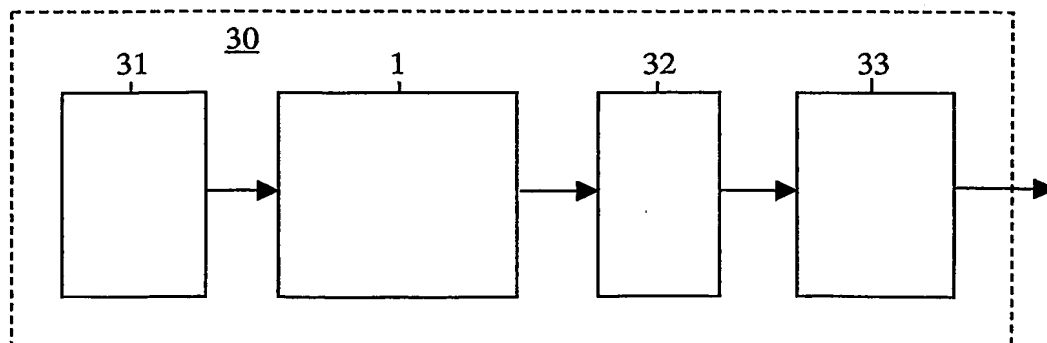


FIG. 4

2/3

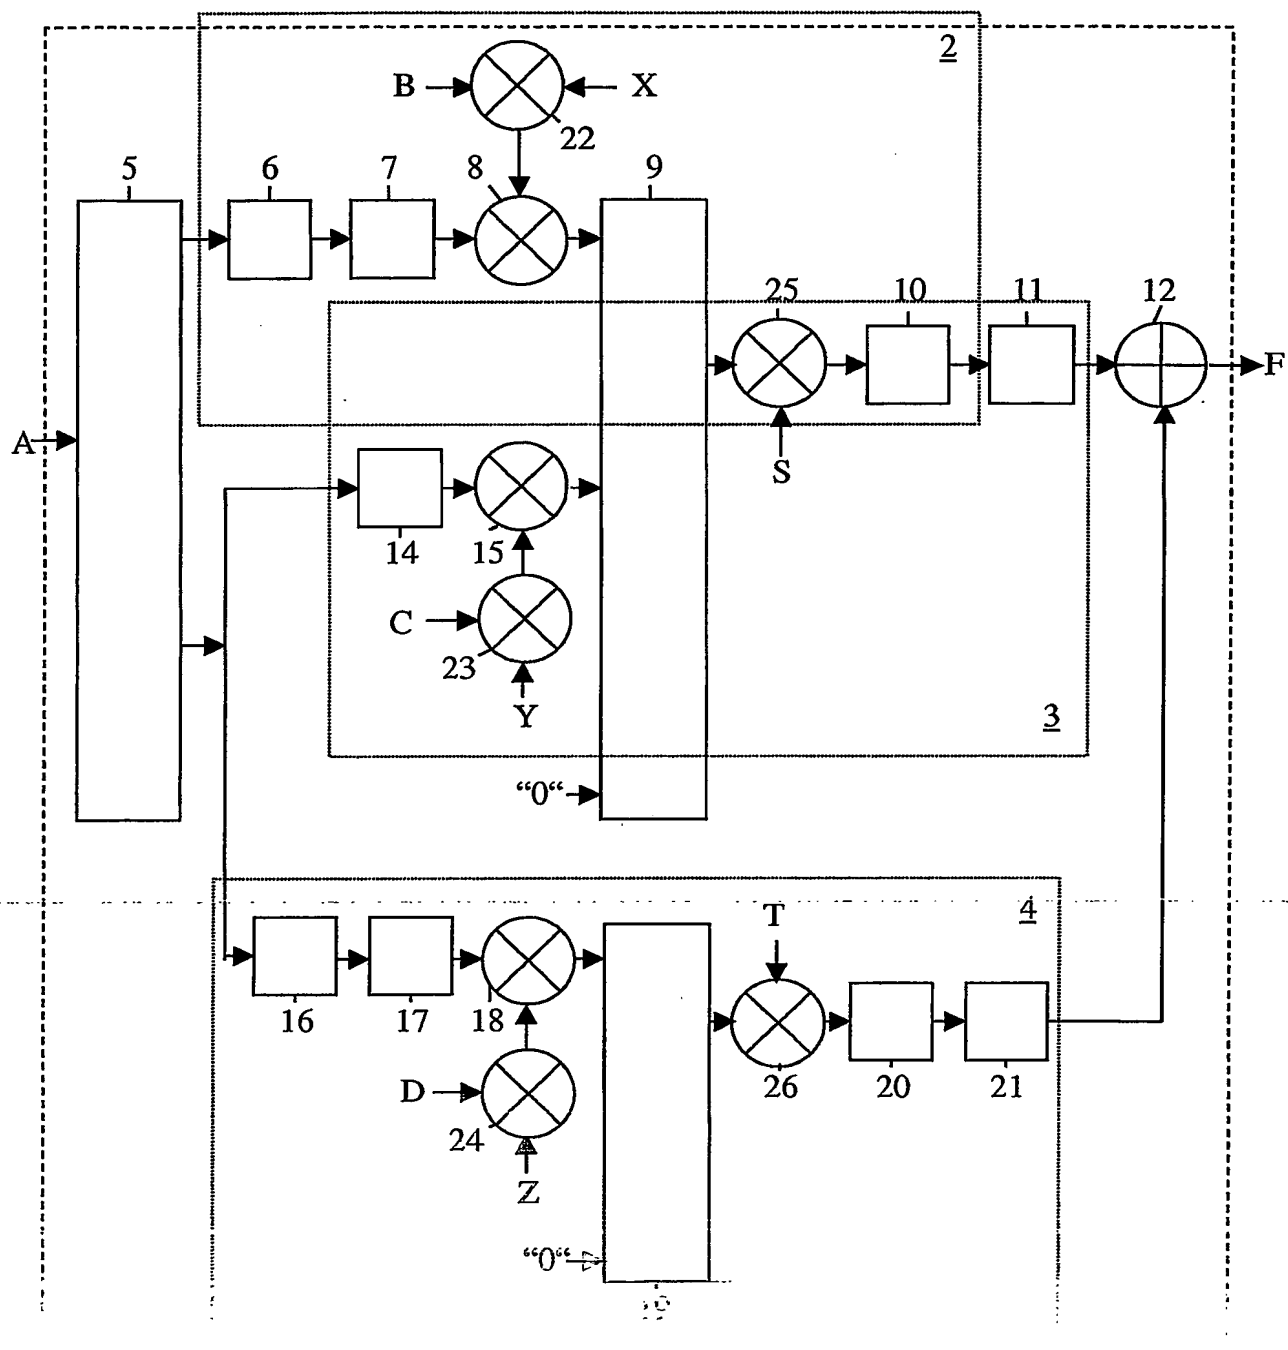

3/3

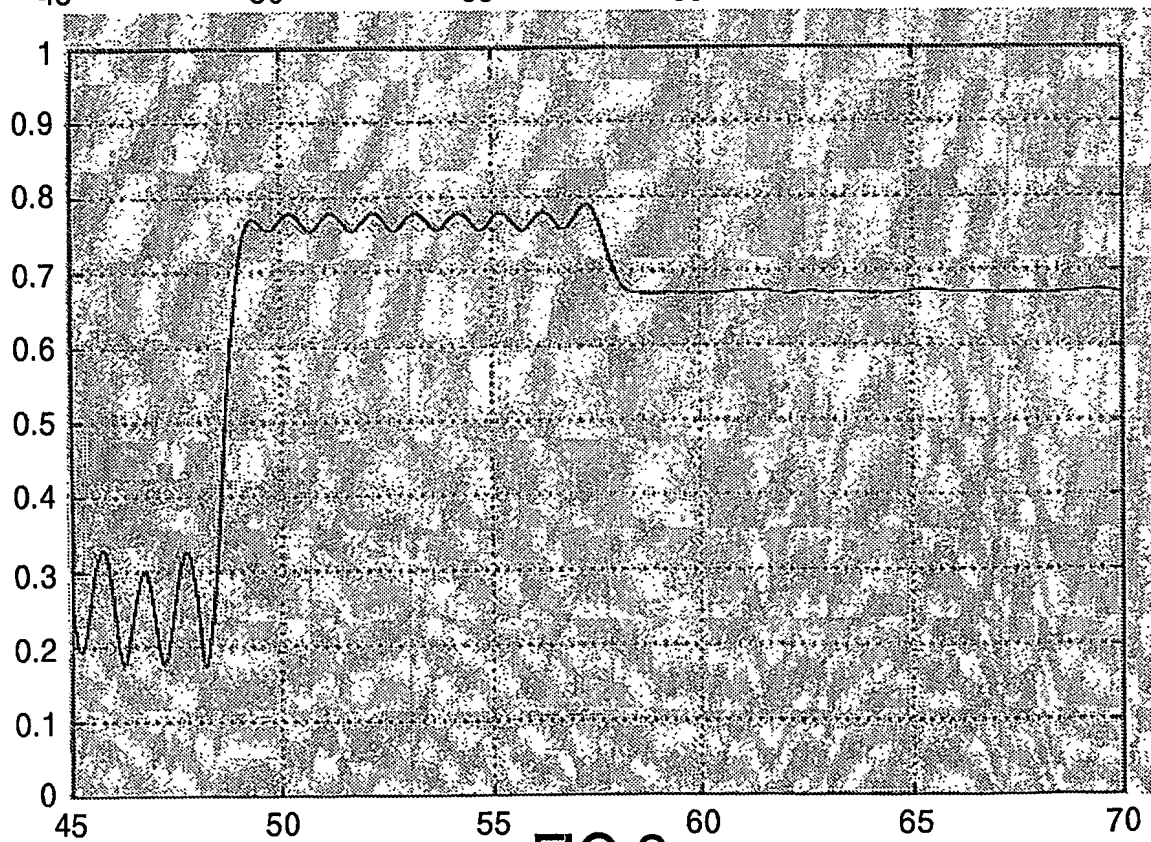
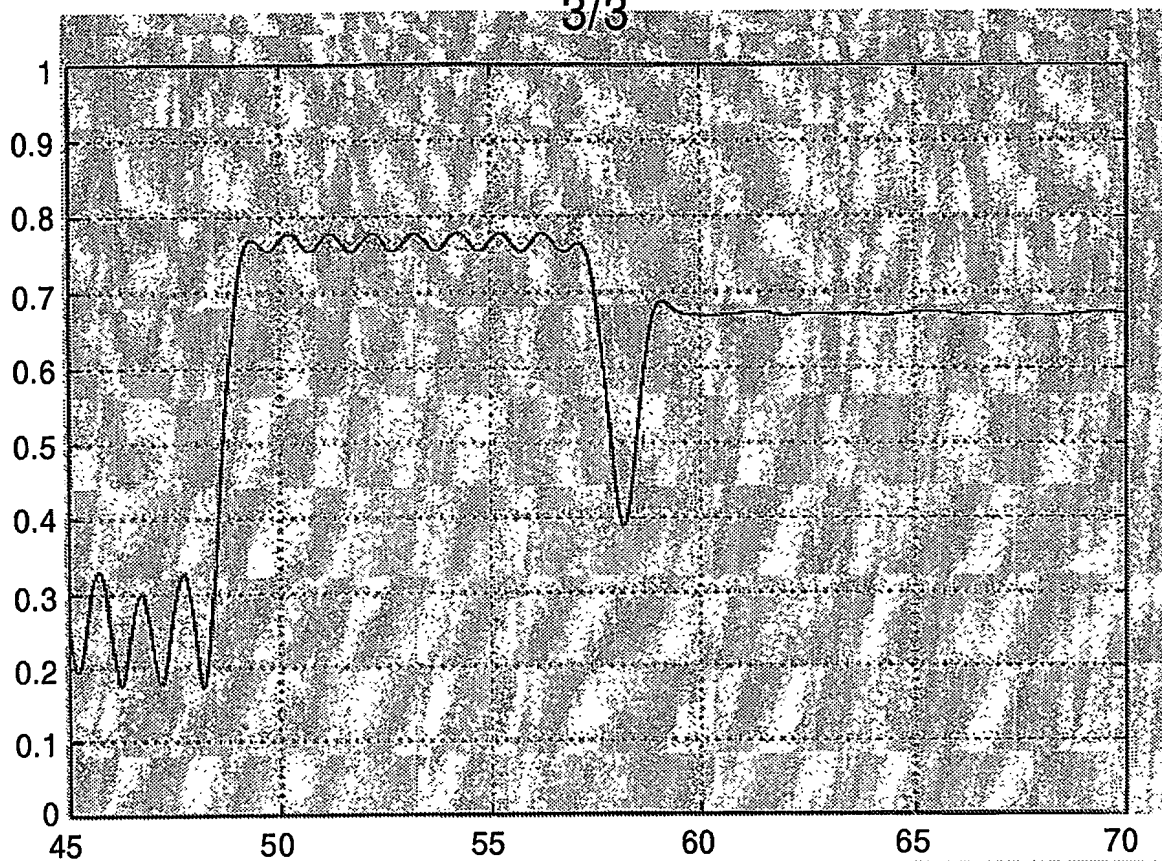


FIG.3

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☒ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.